

# Installation Notes for Rinker Mixer With a C-10 Engine

KIT 01-50002

DOC 19-00071

The following document is used in conjunction with the **puraDYN** Bypass Oil Filtration System Installation Manual (PFT 24) that is included in the unit box, and as such, should be considered a supplemental source of information. Further, this document covers the installation of a PFT 24 Bypass Oil Filtration system on a **Rinker Mixer with C-10 Engine**



**Mounting the Unit:** The PFT 24 Bypass Oil Filtration system should be mounted to the frame rail (**picture 1**). Use the 3/8 hardware to fasten the mounting plate to the frame rail. Mount the unit the support bracket. Attach with the supplied hardware. (**See Pictures 1 & 2**)



Picture 1



Picture 2

## Installation Notes for Rinker Mixer With a C-10 Engine

KIT 01-50002

DOC 19-00071

**Installing the presser fittings:** Remove the Oil port setscrew and install the 90° shut-off valve (supplied) connected to a 7/16 Boss O-ring x 1/8" fitting. Route high-pressure hose to the 90° valve on the engine. Connect hose to 90° shut-off valve and **puraDYN** Filter Unit. (See Pictures 3 & 4)



Picture 3



Picture 4

**Installing the Banjo Fitting:** Remove the oil drain plug on the side of the oil pan. Install the fitting to the drain pan (picture 5). The PFT 24 Bypass Oil Filtration system oil return hose routing should not come in contact with any moving parts or sharp edges. After draining the engine oil and cleaning all surfaces, install the return fitting into the oil pan drain port. **Note:** Properly orient the fitting in order to avoid damage from road debris. Connect the oil return hose and secure in place with radiator clamps. **Note:** If necessary, cover the oil return hose with a secondary hose (or equivalent) to better protect it from getting damaged.



Picture 5


**(Note)** Even though a banjo fitting has been provided, some engines have been known to have different size drain plugs, requiring a different size banjo fitting. If the banjo fitting provided does not match to the specific drain plug size contact your local **puraDYN** dealer or **puraDYN** directly ( 866- puraDYN ) for a different size banjo fitting.

## Installation Notes for Rinker Mixer With a C-10 Engine


KIT 01-50002

DOC 19-00071

**Installing the puraDYN Heater:** Route one electrical wire to the puraDYN bracket for your ground. (See picture 6) run the other puraDYN wire to ignition power using supplied electrical hardware and in-line fuse. (See picture 7) Also, ensure that both hose and wire routing does not come in contact with moving parts, sharp edges or hot exhaust manifolds.

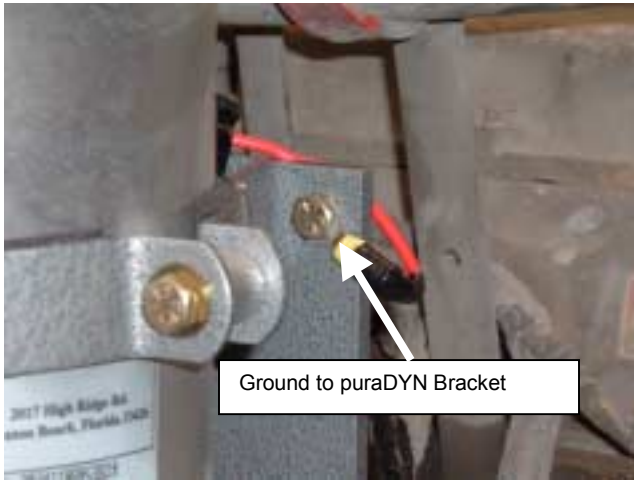

Picture 6

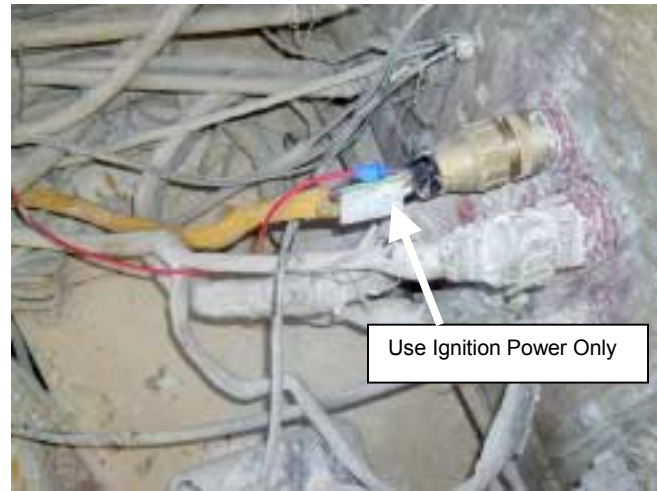

Picture 7

Tie off all lines with tie wraps. Fill engine with oil. Start engine and check all connections for oil leaks. Open metering jet sample valve and verify that oil flow is present. After five minutes of engine operation, touch the bottom center of the PFT Bypass Oil Filtration unit and verify that it is warm to the touch. Shut engine off and check oil level. Place puraDYN Installation Manual (PFT8 through PFT60) in the documentation holder mounted to the equipment